



Technical Specifications

HP ProDisplay P221 21.5-inch LED Backlit Monitor

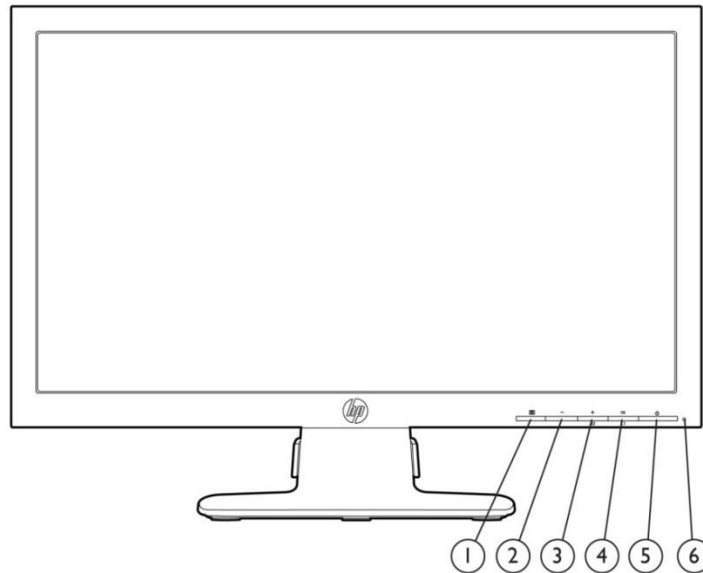

- | | | | |
|----------------------|---|---------------------|---|
| 1. Menu | Opens, selects or exits the OSD menu. | 4. OK/Auto | If the OSD menu is on, press to select the highlighted menu item.
If the OSD menu is inactive, press to activate the auto adjustment feature to optimize the screen image. |
| 2. Minus | If the OSD menu is on, press to navigate backward through the OSD menu and decrease adjustment levels. | 5. Power | Turns the monitor on or off. |
| 3. Plus/Input | If the OSD menu is on, press to navigate forward through the OSD menu and increase adjustment levels.
If the OSD is inactive, press to activate input button that chooses the video signal input (VGA or DVI). | 6. Power LED | White = Fully powered.
Amber = Sleep mode.
Flashing Amber = Sleep Timer mode. |

Boost Productivity with Dual Monitor Work Solution

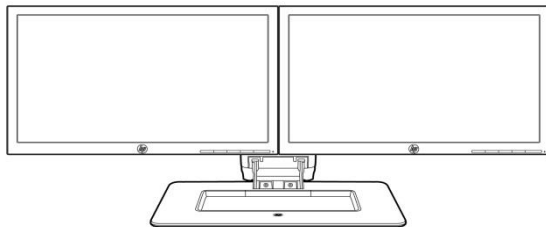

Use two P221 monitors with an HP Adjustable Dual Display Stand (AW664AA) for a small footprint, high productivity work solution.

(Multi-monitor support depends on your PC capability. Monitors and stands are sold separately.)

Technical Specifications

Model:	C9E49AA Head only KOL25AA* *Note: Head only models may not be available in all regions. Head only models are not TCO certified.
Panel	<p>Type TN (Twisted Nematic) LED Backlit LCD</p> <p>Viewable Image Area (diagonal) 54,61 cm (21.5 in.) widescreen; diagonally measured</p> <p>Screen Opening (W x H) 47,8 x 26,9 cm (18.74 x 10.55 in.)</p> <p>Aspect Ratio 16:9</p> <p>Viewing Angle (typical) Up to 170° horizontal/160° vertical (10:1 minimum contrast ratio)</p> <p>Brightness (typical)* 250 nits (cd/m²)</p> <p>Contrast Ratio (typical)* 1000:1</p> <p>Dynamic Contrast Ratio (typical)* 3,000,000:1</p> <p>Response Time (typical)* 5 ms (on/off)</p> <p>Pixel Pitch 0.248 mm</p> <p>Backlight Lamp Life (to half brightness) 30,000 hours</p> <p>Color Gamut (typical) 72%</p> <p>Color Support** Can display up to 16.7 million colors</p> <p>*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. ** With the use of FRC technology.</p>
On Screen Display (OSD) Controls	<p>Buttons or Switches Menu, Minus (“-“), Plus (“+“)/Input, OK/Auto and Power</p> <p>Languages English, French, German, Italian, Dutch, Spanish, Japanese, Portuguese, Traditional Chinese, and Simplified Chinese</p> <p>User Controls Brightness, contrast, positioning, color temperature (6500k, 9300k, custom), individual color control, serial number, display, clock, clock phase, monitor management, factory reset.</p>
Signal Interface/ Performance	<p>Horizontal Frequency 24 to 94 kHz</p> <p>Vertical Frequency 50 to 76 Hz</p> <p>Native Resolution 1920 x 1080 @ 60 Hz</p> <p>Preset VESA Graphic Modes (non-interlaced) 640x 480 @ 60 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 1024 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz</p>
Video/Other Inputs	<p>Text Mode 720 x 400 @ 70 Hz</p> <p>Maximum Pixel Clock Speed 170 MHz</p> <p>User Programmable Modes Yes (10)</p> <p>Anti-Glare Yes</p> <p>Default Color Temperature 6500 K</p> <p>Plug and Play Yes</p> <p>Input Connectors VGA (analog); DVI with HDCP support</p> <p>Input Impedance 75 Ohms</p> <p>Sync Input TTL separate synch</p>

Technical Specifications

Power	Video Cables	(1)VGA; (1) DVI		
	Video Cable Lengths	1,8 m (5.9 ft.)		
	Audio	No		
	Audio Cable Length	N/A		
	Power Supply	Internal		
	Input Power	100 – 240 VAC, 50 or 60 Hz		
	Typical Power Consumption	22 W		
	Maximum	28 W		
Power Saving	< 0.5 W			
Power Cable Length	1,9 m (6.2 ft.)			
Mechanical	Dimensions (W x D x H)	Unpacked w/stand	51,8 x 16 x 37.9 cm, (20.39 x 6.3 x 14.92 in.)	
		Unpacked w/o stand (head only)	51,8 x 4,75 x 31.52 cm, (20.39 x 1.87 x 12.4 in.)	
		Packaged	58,8 x 13,2 x 44,7 cm, (23.15 x 5.2 x 17.6 in.)	
	Weight	Base area (footprint)	23,85 x 16 cm, (9.4 x 6.3 in.)	
		Head Only	3,3 kg (7.48 lb.)	
		Unpacked	4 kg (8.8 lb.)	
Packaged	5,5 kg (12.1 lb.)			
Environmental	Tilt Range	-5° to +25°		
	Swivel Range	No		
	Height Adjustable	No		
	Pivot Rotation	No		
	Base	ships detached		
	Temperature - Operating	5° to 35° C (41° to 95° F)		
	Temperature - Non-operating	-20° to 60° C (-4° to 140° F)		
	Humidity - Operating	20% to 80% non-condensing		
	Humidity - Non-operating	5% to 95%, 60° C max wet-bulb		
	Altitude - Operating	+0 to 5,000 m (16,404 ft)		
	Altitude - Non-operating	0 to 12,192 m (0 to 40,000 ft)		
	White LED Backlights	Yes		
CCFL Panel	No			
Arsenic-Free Display Glass⁴	Yes			
Low Halogen⁵	Yes (everything except external cables)			
Mercury Free Display	Yes			
Environmental Data	Backlighting			
	Eco-Label Certifications & declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: <ul style="list-style-type: none"> • IT ECO declaration • US ENERGY STAR® • EPEAT® Gold where HP registers commercial desktop products. See http://www.epeat.net for registration status in your country US Federal Energy Management Program (FEMP) 		
Energy Consumption (in accordance with US ENERGY STAR® test method)				
		115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
	Normal Operation	17 W	17.4 W	NA
	Sleep	0.35 W	0.44 W	NA
	Off	0.17 W	0.23 W	NA

Technical Specifications

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation	58.14 BTU/hr	59.508 BTU/hr	NA
Sleep	1.197 BTU/hr	1.5048 BTU/hr	NA
Off	0.5814 BTU/hr	0.7866 BTU/hr	NA

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 14.3 % post-consumer recycled plastic (by wt.)
- This product is 98.8 % recycle-able when properly disposed of at end of life.

Internal :	Paper/Corrugated	996 g
	PLASTIC/EPS (Expanded Polystyrene)	572 g
	PLASTIC/EPE-Expanded Polyethylene	18 g

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.

Technical Specifications

- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/qcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Technical Specifications

Options (sold separately)	HP Adjustable Dual Display Stand—Part Number AW664AA	Premium space-saving dual screen solution provides access to more monitor real estate and makes it possible to manage multiple applications simultaneously. Weight adjustable for dual monitors from 17-24". Rotate displays into portrait/landscape positions.
	HP LCD Monitor Quick Release—Part number EM870AAⁱ	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.
	HP USB Graphics Adapter—Part number NL571AA	Enables connection of up to six simultaneous displays to help you boost productivity and multi-task across several open applications. Use one Adapter to bridge between a notebook or desktop PC and second monitor or use multiple Adapters to connect several displays to each other.
	HP Business PC Security Lock Kit—Part number PV606AA	Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.
	HP LCD Speaker Bar—Part number NQ576AA	Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and dual external headphone jacks. Sold separately. For more information, refer to the product's QuickSpecs.
	HP Integrated Work Center Stand - USDT and Thin Clients)—Part number LH526AA	Allows mounting of a 17 - 24 inch diagonal HP LCD monitor and an HP Compaq 8000 series Ultra-slim Desktop PC as well as select HP Thin Clients on a single stand for the convenience of an "all-in-one" form factor. For more information, refer to this product's QuickSpecs document.
	HP Single Monitor Arm—Part number BT861AA	The flexible design of the HP Single Monitor Arm provides a seemingly endless range of display adjustments with an amazing 13 inches of lift, 50 degrees of tilt, and 360 degrees of pan and rotation – all at your fingertips -- helping you stay comfortable and productive throughout the day.
What's in the box?	Monitor and Accessories	HP ProDisplay P221 21.5-inch LED Backlit Monitor, VGA cable, DVI cable and AC Power cable.
	Documentation	Printed documentation and CD
Other	Featured Software	Yes – HP Display Assistant
	User Guide Languages	Arabic, Bahasa Indonesia, Chinese-S, Chinese-T, Czech, Danish, Dutch, English, Finnish, French (European), German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Portuguese (Brazilian), Russian, Slovenian, Spanish (International), Swedish, Turkish.
	Warranty Languages	Arabic, Bahasa Indonesia, Chinese-S, Chinese-T, Czech, Danish, Dutch, English, Finnish, French (European), German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Portuguese (Brazilian), Russian, Slovenian, Spanish (International), Swedish, Turkish.
	Color	Black
	VESA External Mounting	Yes (one set of standard 4-hole pattern, 100 mm).
	Security Lock-Ready	Yes
Certification and Compliance	TCO Displays, ISO 9241-307, CISPR Requirements, VCCI Approvals, KC and KCC (Korean) Requirements, CSA 60950-1, UL 60950-1, EN55022 Class B, CNS 13438 Class B, IEC 60950-1, China Energy Label (CEL), China MEPS, Korea MEPS (pending, Energy Boy), SmartWay – NA only - Energy logistics, EUP Lot 6 Tier 1 AS/NZS 3548 Class B Approval, "GS" Mark, TUV Approvals, GEEA, CE Marking, FCC Part 15 class B Approval, ENERGY STAR® qualified, EN55024 Class B, EN60950 -1, CUL, CCIB, CCEE, IT ECO (EDS), EPEAT® Gold (select regions) ³	

Technical Specifications

Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	Protected by HP, including a 3 year standard limited warranty. Select HP Care Pack Services ² to extend service contracts beyond the standard warranties.

© Copyright 2012, 2013 Hewlett-Packard Development Company, L.P.

ENERGY STAR[®] is a US registered mark of the United States Environmental Protection Agency.

¹ The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.

² Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at www.hp.com/hps/carepack.

³ EPEAT[®] Gold where HP registers commercial display products. See www.epeat.net for registration status in your country.

⁴ Arsenic and its compounds were not detected using US EPA Test Methods 3052 & 3052/6010b by ICP or ICP-AES.

⁵ External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Technical Specifications

Summary of Changes

Date of change:	Version History:		Description of change:
July 31, 2014	From v1.7 to v7	Added	Added a new model and a disclaimer note
		Added	Added change log
		Upgrade	Change the version, so it would match the PB
