


## Data Sheet

## Switched Power Distribution Unit

### Switched Power Distribution Units for Smart Network Power Monitoring

Improve power distribution with the BCD-SPD family, a series of switchable power distribution units (Switched PDU) that combine the key features needed to manage high density equipment racks or wiring closets.

The BCD-SPD delivers reliable power distribution to multiple units of connected equipment by adding up to 16 switched receptacles to your rack space. These PDUs compliment your current power source and are compatible with any manufacturer's UPS.

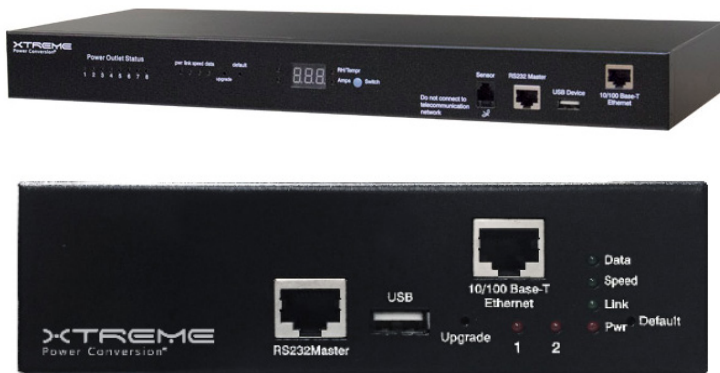

### KEY FEATURES

- Local and remote current checking
- DHCP or static IP configuration
- Current alarm notifications
- Event timers / clock for each outlet



Network Level Settings



Port-Based Password Protection



Two-Year Warranty

INPUT	
Power Input	C13 - 5-15P
Input Current	15A
Input Voltage	120VAC
OUTPUT	
Power Outlets	Up to (8) NEMA 5-15R
MECHANICAL	
Form Factor	1U Rackmount
Communications Interface	Baud rate: 115200; 8 data bits; no parity; 1 stop bit; no hardware handshaking
Ethernet	10/100 Base-T
Network Protocols	ICMP, IP, TCP, DHCP, Telnet, DNS, POP3/SMTP, SNMP, HTTP, BootP
Operating Temperature	(Min) 32°F to (Max) 122° F [(Min) 0°C to (Max) 50° C]
Operating Humidity	10 ~ 90% (non-condensing)
Max Dimensions (WxDxH)	19" x 7" x 1.75" (482.6mm x 177.8mm x 44.45mm)
Warranty	Two-Year Warranty

FOR MORE INFORMATION: [bcdvideo.com](http://bcdvideo.com) | [sales@bcdvideo.com](mailto:sales@bcdvideo.com) | +1.847.205.1922    TECH SUPPORT: [support@bcdvideo.com](mailto:support@bcdvideo.com) | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.