

Price Matrix

Ultra-Slim PDU

BCD-J40 UPS Common Specifications					
Capacity	10A				
Input Frequency	50 / 60 Hz				
Output Frequency	50 / 60 Hz				
Surge Suppression	2,400 joules				
Communication Interface	J40SP - RJ45 Ethernet switch				
Operating Temperature	(Min) -4°F to (Max) 158° F [(Min) -20°C to (Max) 90° C]				
Operating Humidity	0 ~ 90% (non-condensing)				
Altitude	11,500 ft (3505.2m) above sea level				
Warranty	Three-Year Warranty				
Product	Input Voltage	Output Voltage	Receptacles	Line Cord	MSRP (USD)
BCD-J40	120VAC	120VAC	(3) 5-15R	C13 - 5-15P	\$ 244.00
BCD-J40SP	120VAC	120VAC	(3) 5-15R	C13 - 5-15P	\$ 500.00



FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Lithium Battery UPS

BCD-J60 UPS Common Specifications					
Capacity	350VA (200W)				
Input Frequency	50 / 60 Hz				
Output Frequency	50 / 60 Hz				
Surge Suppression	312 joules				
Waveform	Sine wave (normal), simulated sine wave (battery mode)				
Transfer Time	2 - 6 ms (typical)				
Battery Type	Lithium Iron Phosphate (LiFePo4)				
Battery Runtime	6 min at 100% load; 14 min at 50% load				
Communication interface	USB				
Operating Temperature	(Min) 32°F to (Max) 104° F [(Min) 0°C to (Max) 40° C]				
Operating Humidity	0 ~ 90% (non-condensing)				
Altitude	11,500 ft (3505.2m) above sea level				
Warranty	Five-Year Warranty				
Product	Input Voltage	Output Voltage	Receptacles	Line Cord	MSRP (USD)
BCD-J60-350	120VAC	230VAC	(3) 5-15R	5-15P to C13	\$ 559.00
BCD-J60i-350	120VAC	230VAC	(2) IEC C13	C14 inlet	\$ 559.00



FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Standby UPS

BCD-XST UPS Common Specification				
Input Voltage	120VAC			
Input Frequency	60 Hz			
Output Voltage	120VAC			
Waveform	Sine wave (normal), simulated sine wave (battery mode)			
Frequency	60 Hz +/- 1 Hz			
Transfer time	2 - 6 ms			
Line Cord	5' (1.5m), 5-15			
Receptacles	(4) NEMA 5-15R			
Battery Type	Sealed, maintenance free lead acid			
Typical Recharge	8 hours to 90% capacity			
Operating Temperature	(Min) 32°F to (Max) 104° F [(Min) 0°C to (Max) 40° C]			
Operating Humidity	0 ~ 90% (non-condensing)			
Altitude	11,500 ft (3505.2m) above sea level			
Warranty	Two-Year Warranty			
Product	Capacity	Battery	Communication Interface	MSRP (USD)
BCD-XST-400	400VA (240W)	(1) 12V 4.5AH	None	\$ 126.00
BCD-XST-600	600VA (360W)	(1) 12V 7AH	USB	\$ 149.00
BCD-XST-800	800VA (480W)	(1) 12V 9AH	USB	\$ 189.00




FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Pure Sine Wave Line Interactive UPS

BCD-P80 UPS Common Specifications					
Input Voltage Nominal	120VAC				
Input Voltage Range	-32% to +27% without use of battery				
Input Frequency	50 / 60 Hz auto-sensing				
Output Voltage	120VAC Nominal (110/115/127 selectable)				
Waveform	Pure sine wave				
Transfer Time	2-6ms				
Efficiency	Up to 99% ECO mode, 95% buck and boost mode				
Battery Type	Sealed, Maintenance-Free Lead Acid				
Charging Current	1.5A max				
Typical Recharge	4 hours to 90%				
Communication interface	RS-232, USB, EPO, intelligent slot for optional cards (Web/SNMP, Relay/dry contact, Modbus)				
Operating Temperature	(Min) 32°F to (Max) 104° F [(Min) 0°C to (Max) 40° C]				
Operating Humidity	0 ~ 90% (non-condensing)				
Audible Noise	< 45dBA				
Altitude	11,500 ft (3505.2m) above sea level				
Warranty	Three-Year Warranty				
Product	Capacity	Battery	Receptacles	Line Cord	MSRP (USD)
BCD-P80-800	800VA (720W)	(2) 12V 7AH	(8) NEMA 5-15R	6' (1.8m), 5-15P	\$ 883.00
BCD-P80-1100	1100VA (990W)	(2) 12V 9AH	(8) NEMA 5-15R	6' (1.8m), 5-15P	\$ 957.00
BCD-P80-1500	1500VA (1350W)	(4) 12V 7AH	(8) NEMA 5-15R	6' (1.8m), 5-15P	\$ 1,281.00
BCD-P80-2000	2000VA (1800W)	(4) 12V 9AH	(8) NEMA 5-15/20R	6' (1.8m), 5-20P	\$ 1,561.00
BCD-P80-2200	2200VA (2000W)	(6) 12V 7AH	(8) NEMA 5-15/20R	6' (1.8m), 5-20P	\$ 1,988.00
BCD-P80-3000	3000VA (2700W)	(6) 12V 9AH	(8) NEMA 5-15/20R	6' (1.8m), L5-30P	\$ 2,018.00

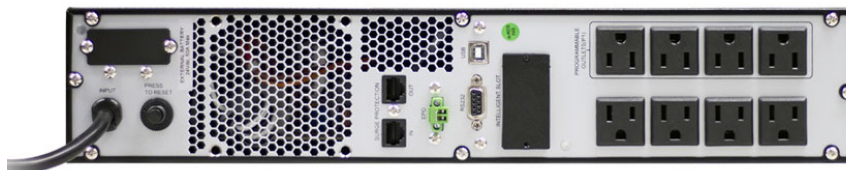

FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Pure Sine Wave Line Interactive UPS

BCD-P80G UPS Common Specifications					
Input Voltage Nominal	120VAC				
Input Voltage Range	-32% to +27% without use of battery				
Input Frequency	50 / 60 Hz auto-sensing				
Output Voltage	120VAC Nominal (110/115/127 selectable)				
Waveform	Pure sine wave				
Transfer Time	2-6ms				
Efficiency	Up to 99% ECO mode, 95% buck and boost mode				
Battery Type	Sealed, Maintenance-Free Lead Acid				
Battery Size	(6) 12V 9AH, (6) 12V 580W				
Charging Current	1.5A max				
Typical Recharge	4 hours to 90%				
Receptacles Options	L6-30R, L6-20R, L6-15R, 6-15/20R				
Communication interface	RS-232, USB, EPO, intelligent slot for optional cards (Web/SNMP, Relay/dry contact, Modbus)				
Operating Temperature	(Min) 32°F to (Max) 104° F [(Min) 0°C to (Max) 40° C]				
Operating Humidity	0 ~ 90% (non-condensing)				
Audible Noise	< 45dBA				
Altitude	11,500 ft (3505.2m) above sea level				
Warranty	Three-Year Warranty				
Product	Capacity	Input Voltage	Output Voltage	Receptacles	MSRP (USD)
BCD-P80g-5000	5000VA (4500W)	208/220/230/240VAC	208/220/230/240VAC	(1)L6-30R, (4) C19	\$ 3,241.00
BCD-P80g-5KB1	5000VA (4500W)	208 / 240VAC	240/120VAC	(2) L6-30R, (2) L6-20R, (12) 5-15/20R	\$ 3,502.00
BCD-P80g-5KB2	5000VA (4500W)	208 / 240VAC	240/120VAC	(2) L6-30R, (2) L6-20R, (12) 5-15/20R	\$ 3,632.00
BCD-P80g-5KTB	5000VA (4500W)	208 / 240 VAC	240/120VAC	(2) L6-30R, (2) L6-20R, (12) 5-15/20R	\$ 5,684.00



FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Online UPS

BCD-P90 UPS Common Specifications					
Input Voltage Nominal	50-150VAC				
Input Frequency	50 / 60 Hz auto-sensing				
Output Voltage	120VAC Nominal				
Waveform	Pure sine wave, <2% at full load				
Frequency	50 / 60 Hz +/- 0.5 Hz				
Efficiency	Up to 98% ECO mode, 90% online mode				
Overload Capacity	≤ 130% for 2 min ≤ 200% for 10 sec, < 200% for 1 sec				
Battery Type	Sealed, Maintenance-Free Lead Acid				
Typical Recharge	< 6 hours to 90%, < 4 hours to 90% with 1A charger current				
Communication interface	RS-232, USB, EPO, intelligent slot for optional cards (Web/SNMP, Relay/dry contact, Modbus)				
Operating Temperature	(Min) 32°F to (Max) 104° F [(Min) 0°C to (Max) 40° C]				
Operating Humidity	0 ~ 90% (non-condensing)				
Audible Noise	< 45dBA				
Altitude	11,500 ft (3505.2m) above sea level				
Warranty	Three Year Warranty				
Product	Capacity	Battery	Line Cord	Receptacles	MSRP (USD)
BCD-P90c-1000	1000VA (800W)	(4) 6V 290W	5' (1.5m), 5-15P	(3) NEMA 5-15R	\$ 1,325.00
BCD-P90-1000	1000VA (900W)	(2) 12V 9AH	6' (1.8m), 5-15P	(8) NEMA 5-15R	\$ 1,473.00
BCD-P90-1500	1500VA (1350W)	(3) 12V 9AH	6' (1.8m), 5-15P	(8) NEMA 5-15R	\$ 1,915.00
BCD-P90-2000	2000VA (1800W)	(4) 12V 9AH	6' (1.8m), 5-20P	(8) NEMA 5-15/20R	\$ 2,490.00
BCD-P90-3000	3000VA (2700W)	(6) 12V 9AH	6' (1.8m), L5-30P	L5-30R + (4) 5-15/20R	\$ 3,388.00



FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Online UPS

BCD-P90G UPS Common Specifications					
Input Voltage Range	110-300VAC				
Input Frequency	50 / 60 Hz auto-sensing				
Surge Protection	>800J				
Max Output Voltage	208/220/230/240VAC				
Waveform	Pure sine wave, zero transfer time				
Frequency	50 / 60 Hz +/- 0.5 Hz				
THD	<2%				
Efficiency	Up to 98% ECO mode, 90% online mode				
Overload capacity	≤ 130% for 2 min ≤ 200% for 10 sec, < 200% for 1 sec				
Battery Type	Sealed, Maintenance-Free Lead Acid				
Typical Recharge	< 4 hours to 90% with 1A charger current				
Communication interface	RS-232, USB, EPO, intelligent slot for optional cards (Web/SNMP, Relay/dry contact, Modbus)				
Operating Temperature	(Min) 32°F to (Max) 104° F [(Min) 0°C to (Max) 40° C]				
Operating Humidity	0 ~ 90% (non-condensing)				
Audible Noise	< 45dBA				
Altitude	11,500 ft (3505.2m) above sea level				
Warranty	Three-Year Warranty				
Product	Capacity	Battery	Line Cord	Receptacles	MSRP (USD)
BCD-P90G-1500	1500VA (1350W)	(3) 12V 9AH	8' (2.4m), C13 - L6-20P	(8) NEMA IEC C13	\$ 1,871.00
BCD-P90G-3000	3000VA (2700W)	(6) 12V 9AH	8' (2.4m), C19 - L6-20P	(1) IEC C19, (6) IEC C13	\$ 2,946.00
BCD-P90G-3KTB	3000VA (2700W)	(6) 12V 9AH	8' (2.4m), C19 - L6-20P	(1) IEC C19, (6) IEC C13	\$ 3,875.00



FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Line Interactive UPS

BCD-S70 UPS Common Specifications					
Input Voltage	120VAC				
Input Frequency	60Hz				
Output Voltage	120VAC				
Output Frequency	60Hz +/- 1Hz				
Waveform	Sine wave (normal), simulated sine wave (battery mode)				
Recharge	4-6 hours to 90% capacity				
Operating Temperature	(Min) 32°F to (Max) 104° F [(Min) 0°C to (Max) 40° C]				
Operating Humidity	0 ~ 90% (non-condensing)				
Altitude	11,500 ft above sea level				
Warranty	Three-Year Warranty				
Product	Capacity	Battery	Line Cord	Receptacles	MSRP (USD)
BCD-S70-500	500VA (300W)	(1) 12V 7AH	5' (1.5m), 5-15P	(4) 5 - 15R	\$ 201.00
BCD-S70-700	700VA (420W)	(1) 12V 9AH	C13 to 5-15P	(4) 5 - 15R	\$ 264.00
BCD-S70-1000	1000VA (600W)	(2) 12V 7AH	5' (1.5m), 5-15P	(6) 5 - 15R	\$ 353.00
BCD-S70-1500	1500VA (900W)	(2) 12V 9AH	4' (1.2m), 5-15P	(8) 5 - 15R	\$ 515.00
BCD-S70-2000	2000VA (1200W)	(2) 12V 9AH	4' (1.2m), 5-20P	(8) 5 - 15R	\$ 618.00



FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Switched Power Distribution Unit

BCD-SPD UPS Common Specifications				
Input Voltage	240VAC			
Console Port	Baud rate: 115200; 8 data bits; no parity; 1 stop bit; no hardware handshaking			
Network Protocols	ICMP, IP, TCP, DHCP, Telnet, DNS, POP3/SMTP, SNMP, HTTP, BootP			
Operating Temperature	(Min) 32°F to (Max) 122° F [(Min) 0°C to (Max) 50° C]			
Operating Humidity	10 ~ 90% (non-condensing)			
Warranty	Two-Year Warranty			
Product	Power Input	Input Current	Power Outlets	MSRP (USD)
BCD-SPD-0215	(1) IEC C14	15A	(2) NEMA 5-15R	\$ 574.00
BCD-SPD-0815	(1) IEC C14	15-30A	(8) NEMA 5-15R	\$ 1,090.00



FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Bypass Distribution Module

BCD-XBDM UPS Common Specifications						
AC Frequency	50 / 60 Hz					
Utility Input Options	5-15P, 5-20P, L5-30P, IEC C20					
Cord to UPS Output Options	5-15P, 5-20P, L5-30P, IEC C20					
Max Spike Current	6,500A, N/A on XBDM-MINI					
Max Clamping Voltage	330VAC, N/A on XBDM-MINI					
Communication interface	USB; RS-232 on BCD UPS S70-2000					
Dimensions	1U: 17" x 3.5" x 1.75" (431mm x 88.9mm x 44.4mm) Mini: 3" x 4" x 1.75" (76.2mm x 101.6mm x 44.4mm)					
Operating Temperature	(Min) 32°F to (Max) 104° F [(Min) 0°C to (Max) 40° C]					
Operating Humidity	0 ~ 90% (non-condensing)					
Altitude	11,500 ft (3505.2m) above sea level					
Warranty	Three-Year Warranty					
Product	Voltage/Current	Output	Output Ports	Input	Dissipation	MSRP (USD)
BCD-XBDM-1015LV	120VAC/15A	12A	(6) 5-15R, (4) 5-15R	(1) 5-15R	114J	\$ 412.00
BCD-XBDM-1020LV	120VAC/20A	16A	(6) 5-20R, (4) 5-20R	(1) 5-20R	114J	\$ 471.00
BCD-XBDM-1030LV	120VAC/30A	24A	(5) 5-20R, (5) 5-20R	(1) L5-30R	114J	\$ 736.00
BCD-XBDM-1020HV1	230VAC/20A	16A	(2) C19, (4) C13, (4) C13	(1) C19	220J	\$ 471.00
BCD-XBDM-1020HV2	230VAC/20A	16A	(2) C19, (4) C13, (4) C13	(1) C19	220J	\$ 471.00
BCD-XBDM-MINI	120VAC/15A	15A	(1) 5-15R	N/A	N/A	\$ 251.00
BCD-XBDM-15RHW	120VAC/15A	20A	Terminal Block, (6) 5-15R	(1) 5-20R	N/A	\$ 471.00
BCD-XBDM-20RHW	120VAC/20A	20A	Terminal Block, (6) 5-15R	(1) 5-20R	N/A	\$ 471.00
BCD-XBDM-HW30	120VAC/30A	30A	Terminal Block	(1) L5-30R	N/A	\$ 780.00
BCD-XBDM-HW63	120VAC/63A	63A	Terminal Block	Hardwired	N/A	\$ 706.00



FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.

Price Matrix

Power Distribution Unit

BCD-XPDU UPS Common Specifications					
Form Factor	1U or 2U Rackmount				
Max Dimensions (WxDxH)	19" x 18" x 3.5" (482.6mm x 457.2mm x 88.9mm)				
Max. Weight	137 lbs (62.14 kg)				
Warranty	Three-Year Warranty				
Product	Voltage (In/Out)	Circuit Breaker	Input Connection	Outlets	MSRP (USD)
BCD-XPDU-0815SL	120V	15A	10' 5-15P	(8) 5-15/20R	\$ 721.00
BCD-XPDU-AT15A	208V / 120V	15A	IEC C14	(16) 5-15R	\$ 751.00
BCD-XPDU-IT60A	208V / 120V	30A	3' L6-30P	(1) L6-30R + (12) 5-15/20R	\$ 2,136.00
BCD-XPDU1215HVPL	120V	15A	6' 5-15P	(12) 5-15R	\$ 73.00
BCD-XPDU1415HV	120V	15A	12' 5-15P	(14) 5-15R	\$ 140.00
BCD-XPDU1420HV	120V	20A	12' 5-20P + L5-20P	(14) 5-20R	\$ 205.00
BCD-XPDU24C13V	208V	30A	6' L6-30P	(24) C13	\$ 397.00
BCD-XPDU31	208V	30A	6' L6-30P	(2) L6-30R, (2) L6-20R, (6) 6-15/20R	\$ 618.00
BCD-XPDU32	208V	30A	6' L6-30P	(2) L6-30R + (4) L6-20R	\$ 618.00
BCD-XPDU33	208V	30A	6' L6-30P	(4) IEC C19 + (8) IEC C14	\$ 471.00
BCD-XPDU-IEC	230V	15/20A	IEC C20	(2) IEC C19 + (1) IEC C13	\$ 220.00
BCD-XPS1215HVP	120V	15A	6' 5-15P	(12) 5-15R	\$ 77.00



FOR MORE INFORMATION: bcdvideo.com | sales@bcdvideo.com | +1.847.205.1922 **TECH SUPPORT:** support@bcdvideo.com | +1.844.462.2384

Copyright © 2018, BCDVideo. All rights reserved. This document is provided for information purposes only. The contents are subject to change without notice.